

ROADKIT

24V

For sliding gates weighing up to 400 kg.

Practical: built-in control unit, can be connected by means of a simple connector and can be housed directly inside the motor; incorporated radio card, compatible with the Nice Flo and Smilo systems: 150 transmitters can be entered!

Advanced: the speed, strength and pause can all be adjusted.

Intelligent: thanks to the obstacle detection system and automatic programming of the working times. Self-diagnosis by means of a flashing light.

Practical: the control unit and PS124 buffer battery (optional) can be connected by means of a simple connector and can be housed directly inside the motor.



The new Era Gate accessories, with a minimal, modern and discreet design, renovate Nice kits' style and performance.

Discover the complete range at page 184


CODE	DESCRIPTION
RD400	KIT FOR THE AUTOMATION OF SLIDING GATES UP TO 400 kg AND UP TO 6 m LENGTH, 24 Vdc, WITH INCORPORATED CONTROL UNIT AND RECEIVER

N.B. The content of the package may vary: consult the retailer.

TECHNICAL SPECIFICATIONS

CODE	RD400
ELECTRICAL DATA	
POWER SUPPLY (Vac 50/60 Hz)	230
ABSORPTION (A)	1.1
POWER (W)	210
PERFORMANCE DATA	
SPEED (m/s)	0.25
FORCE (N)	400
WORK CYCLE (CYCLES/HOUR)	20
DIMENSIONAL AND GENERAL DATA	
PROTECTION LEVEL (IP)	44
WORKING TEMP. (°C MIN/MAX)	-20 ÷ +50
DIMENSIONS (mm)	330x195x277 h
WEIGHT (kg)	8

DIMENSIONS

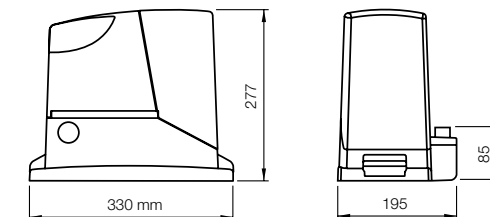

THE KIT CONTAINS:

RD400
1 IRREVERSIBLE ELECTROMECHANICAL GEAR MOTOR, 24 Vdc, WITH INCORPORATED CONTROL UNIT AND RECEIVER.



FL02RE
1 TRANSMITTER 433.92 MHz, 2 CHANNELS.



EPM
1 PAIR OF PHOTOCELLS FOR OUTDOOR INSTALLATION.



EKS
1 KEY SELECTOR SWITCH FOR OUTDOOR INSTALLATION.




ELB
1 FLASHING LIGHT WITH INTEGRATED AERIAL.



TS
1 SIGNBOARD.



INSTALLATION DIAGRAM

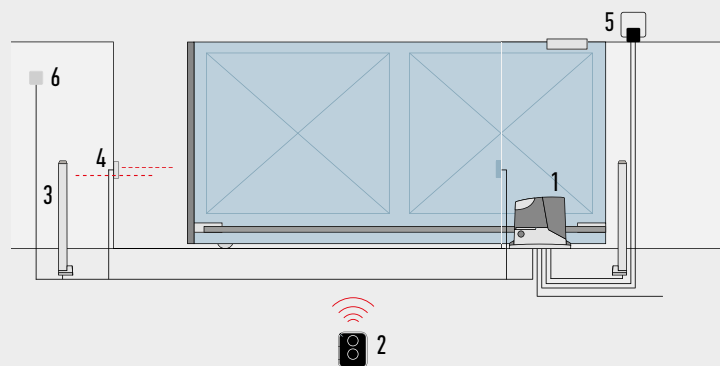

1. MOTOR
2. TRANSMITTER
3. PHOTOCELLS MOUNTED ON POSTS
4. PHOTOCELLS
5. FLASHING LIGHT
6. DIGITAL OR KEY SWITCHES

Nice recommends customers order products in pallets in order to facilitate storage and delivery, and ensure packs are uniform. The number of packs per single pallet has been specified for this reason. Approximate draft.

ACCESSORIES



RBA4
SPARE CONTROL UNIT
FOR RDKCE.



PS124
24 V BATTERY
WITH INTEGRATED
BATTERY CHARGER.
PC/PACK 1



CM-B
PAWL WITH TWO METAL
RELEASE KEYS.



ROA6
M4 25X20X1000 mm SLOTTED
NYLON RACK WITH METAL
INSERT FOR GATES WEIGHING
UP TO 500 kg.
PC/PACK 10



ROA7
M4 RACK, ZINC COATED,
22X22X1000 mm.
PC/PACK 10



ROA8
M4 RACK, 30X8X1000 mm,
ZINC COATED WITH
SPACERS AND SCREWS.
PC/PACK 10

FOR SWING GATES

FOR SLIDING GATES

BARRIER GATE
OPERATOR SYSTEMS

FOR GARAGE
AND INDUSTRIAL DOORS

CONTROL SYSTEMS
AND ACCESSORIES

COMPATIBILITY TABLE
AND ALPHABETICAL INDEX